

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number  
**WO 2004/090586 A1**

(51) International Patent Classification:  
F21V 11/14, G09F 13/04

**G02B 5/02,**

(74) Agent: SANGIACOMO, Fulvia; Biesse S.r.l., Corso  
Matteotti 42, I-25122 Brescia (IT).

(21) International Application Number:  
PCT/IT2004/000157

(22) International Filing Date: 29 March 2004 (29.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
BS2003U000037 7 April 2003 (07.04.2003) IT

(71) Applicant (for all designated States except US): FLOS  
S.p.A. [IT/IT]; Via A. Faini 2, I-25073 Bovezzo (IT).

(72) Inventor; and


(75) Inventor/Applicant (for US only): CITTERIO, Antonio  
[IT/IT]; Via Cerva 4, I-Milano (IT).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: LUMINOUS DIFFUSER WITH DIFFERENTIATED LIGHT EMITTING PARTS FOR LIGHTING EQUIPMENT

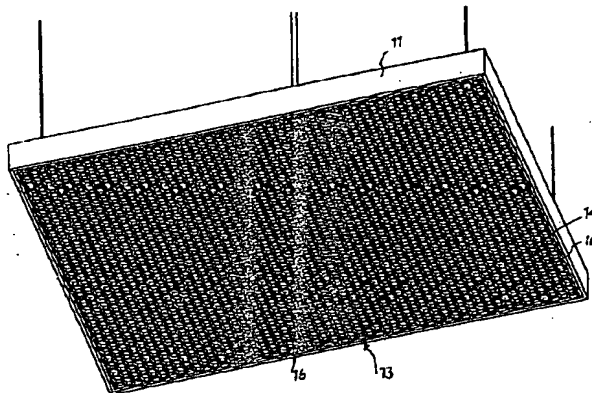

(57) Abstract: This invention concerns a light dif-  
fuser for lighting equipments which is made up of  
a front plate (14) with holes or openings (16) dis-  
tributed uniformly over all its surface, and an inter-  
nal sheet (15) associated with the internal surface of  
the front plate and having holes of a different diam-  
eter (17, 17', 17'') along different parts of its length  
and each positioned in line with an opening in the  
front plate. The front plate and the internal sheet  
may be two associated bodies or form a single inte-  
grated body.

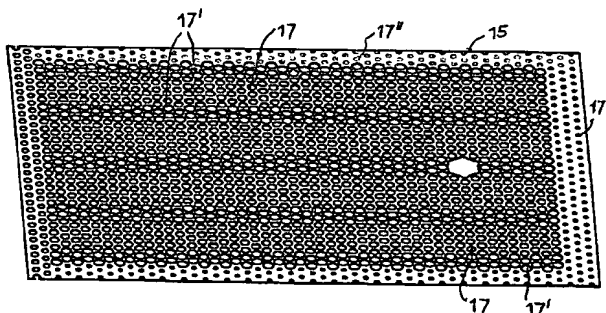

WO 2004/090586 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*